


MILLER **MB & HD** **RANGE**



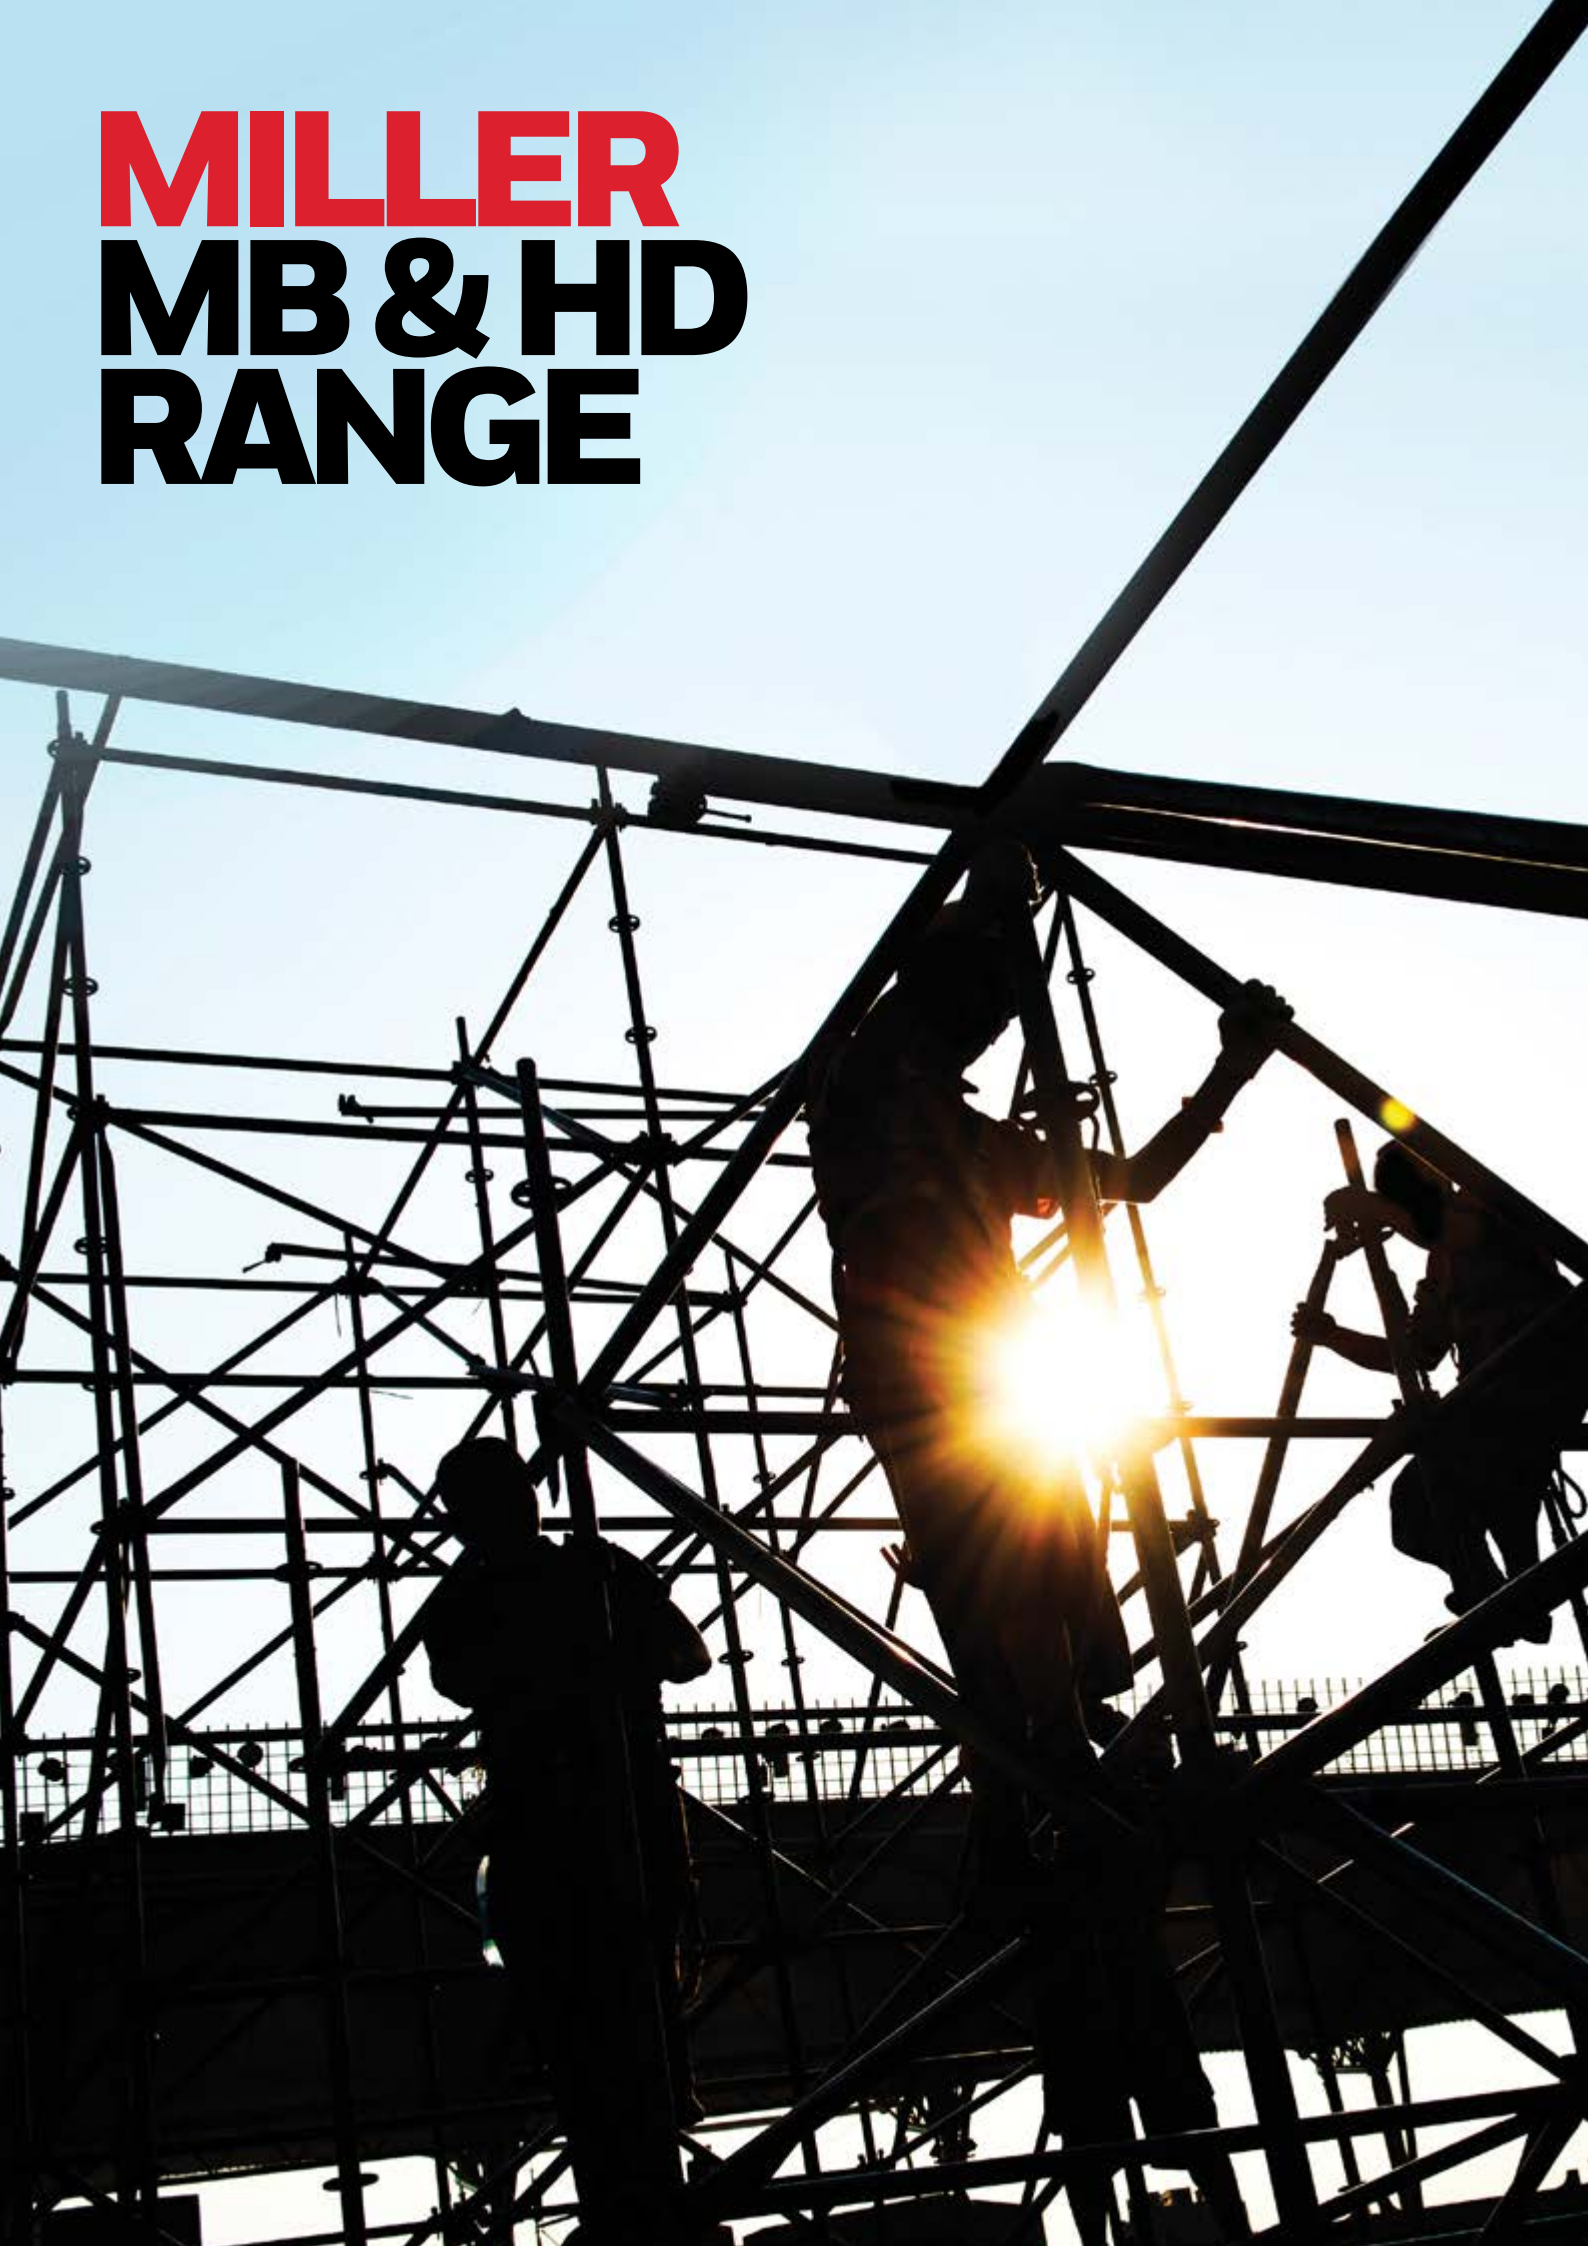

MILLER MB FULL BODY SAFETY HARNESS NEW

Designed to provide your team with superior protection, Honeywell Miller MB Full Body Safety Harness provides the mobility with optimum comfort for long periods of use. It has a lightweight anticorrosion dachrotized steel single rear dorsal D-ring, a cushioned back pad, and a durable and adjustable polyamide webbing strap that perfectly fits ASEAN sizes.



FEATURES & BENEFITS

- Lightweight, high corrosion resistance dachrotized steel single fall arrest dorsal D-ring and matting buckles.
- Comfortable cushioned back pad.
- Durable 44mm polyamide webbing strap.
- One-size-fits-all, for ASEAN sizes – S, M & L.
- Easy-to-wear harness.
- 3 adjustment points – Pass-thru buckles on chest and leg straps.
- Yellow and black colored strap for greater visibility from a distance and in dark environments.
- Maximum working load up to 100kg.



CERTIFICATIONS

- EN 361:2002
- Singapore PSB SS528: Part 6: 2006
- Malaysia SIRIM



APPLICATION

Suitable for fall arrest application in construction industry and for general works at height.

REF.	DESCRIPTION	WEIGHT	UOM
MB9000	Full Body Harness, 1 Back D-Ring	750g	PC

MILLER MB ENERGY ABSORBING LANYARD ROPE NEW

Highly resistant, durable,
lightweight – offers optimal
protection and better comfort
in case of fall.

FEATURES & BENEFITS

- Lightweight, anti-corrosion dachrotized steel connectors: double-lock scaffold hook, large opening 52mm; auto-twist locking carabiner, opening 17mm.
- Durable polyester rope Ø 12mm, static strength > 22kN.
- Energy Absorber, high resistant 32mm polyamide double-layer tearing webbing.
- Maximum arresting force of 6kN.



MB 9006



MB 9007



CERTIFICATIONS

- EN 355:2004
- Singapore PSB SS528: Part 6: 2006
- Malaysia SIRIM



APPLICATION

Suitable for fall arrest application in construction industry and for general works at height.

REF.	DESCRIPTION	CONNECTORS	WEIGHT
MB9006	Single Tail Lanyard Rope	1 Double-lock Scaffold Hook, 1 Auto-twist Locking Karabiner	850g
MB9007	Twin Tails Lanyard Rope	1 Double-lock Scaffold Hook, 2 Auto-twist Locking Karabiner	1.79kg

MILLER HD 2 PTS HARNESS NEW

The new Honeywell Miller® HD 2 Pts Harness is designed to offer you the comfort and convenience you need to do your job confidently. When using it together with Honeywell Miller® HD Shock-Absorbing Lanyard, they provide you exceptional safety and comfort in the case of a fall.

FEATURES & BENEFITS

Comfort and Freedom of Movement

- Exclusive H-Architecture of the harness, thanks to its ergonomically placed webbing, providing a total freedom of movement for the arms.
- Horizontal leg straps preventing uncomfortable friction on the legs and on the groin v/s traditional leg straps increasing comfort for the user during work.

Easy and Quick Adjustability & Connection

- Easy to access and adjust buckles: Intuitive movement up to down.
- Very accessible anchor points: Front D-Ring and Extra Size Back D-Ring for rescue operations.
- Front D-ring for Frontal Ladder
- Adjustable torso strap with matting buckles for a perfect fit in height.
- Adjustable leg straps with mating buckles.
- Easy front strap clip.

Greater Safety and Easier Traceability

- Fluro - Orange textile, high visible stitching, back fall indicators to facilitate visual inspection before working.
- Sealed labels improving yearly checking follow-up for a better traceability.
- Fall Indicator feature for better and easy visual periodical inspection.




CERTIFICATIONS

- EN 361 - Safety Harness
- JIS T 8165:2018



APPLICATION

- Suitable for Fall Arrest, Frontal Climbing, and Confined Space descending/ascending application
- In Oil&Gas, Maintenance, Food & Beverage, Construction, Telecommunication, Tower Works

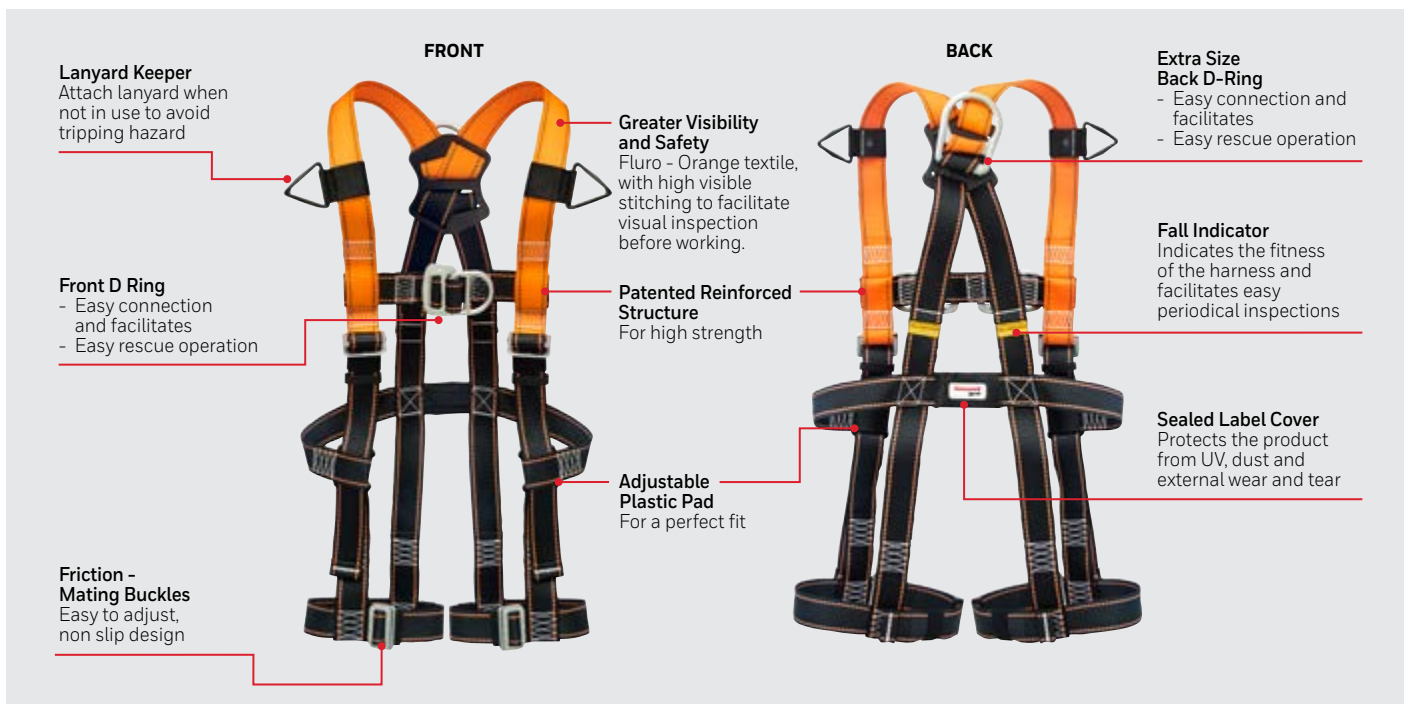

REF.	SIZE	FRONT D-RING	BACK D-RING	FALL INDICATOR	CHEST STRAP BUCKLES	TORSO STRAP BUCKLES	LEG STRAP BUCKLES	LANYARD HANGING RINGS	WEIGHT
FPSEAEH10001S/M	SMALL - MEDIUM	Yes	Yes	Yes	Mating	Mating	Mating	Yes	1.3kg
FPSEAEH10001L/XL	LARGE - XL								

MILLER HD SHOCK ABSORBING LANYARD NEW

Pack-Type Shock-Absorbing Lanyards include the shock-absorber pack as an integral part of a standard lanyard. In the event of a fall, the pack expands, reducing fall forces while a back-up safety strap deploys for added fall protection.

Shock Absorber pack is designed with a specially-woven inner core that smoothly expands reducing fall arrest forces.

Reinforced Webbing Protection
Extra polyester cover reinforced to ends avoid wear

Rebar Hook
Auto lock galvanized steel 53mm opening scaffolding hooks

Polyester Webbing
New vibrant Hi-Viz 45mm webbing to avoid entanglements

Karabiner
Screw lock galvanized steel 17mm opening



Product Label
UV protected labels which withstands hard environmental conditons



Shock Absorber
Heated treated shrink packed transparent cover shock absorber



CERTIFICATIONS

- EN 355
- JIS T 8165:2018



APPLICATION

- Suitable for Fall Arrest, Frontal Climbing, and Confined Space descending/ascending application
- In Oil&Gas, Maintenance, Food & Beverage, Construction, Telecommunication, Tower Works

REF.	NUMBER OF LEGS	MIN. CLEARANCE TO LANYARD	KARABINER GATE OPENING	HARNESS CONNECTION	HOOK GATE OPENING	ANCHORAGE CONNECTION	WEBBING MATERIAL	HARDWARE MATERIAL	LENGTH	WEIGHT
FP81LTW1.7R	2	6.2m	17mm	Karabiner	53mm	Rebar Hooks	Polyester	Steel	1.7m	1.7kg