


D150

Specification:

1. Material & Fittings: Stainless Steel 304
2. Shower Valve: 1" stainless steel 304 stay open ball valve.
Eyewash Valve: 1/2" stainless steel 304 stay open ball valve.
3. Water inlet & outlet: 1/2" IPS/NPT.
4. Tank Capacity: 114L
Water Capacity: 80L
5. Water working pressure: 0.3MPa-0.55MPa.
6. Flow Rates: Shower 50L/Min
Eyewash 12L/Min
7. Original water: Clean water or leached water.
8. Activation: By pull down handle.
9. Package: Carton size: 60X60X120CM
1 set per export carton
G.W.: 46KG N.W.: 44KG



Meets
EN15154-1&2
ANSI Z358.1

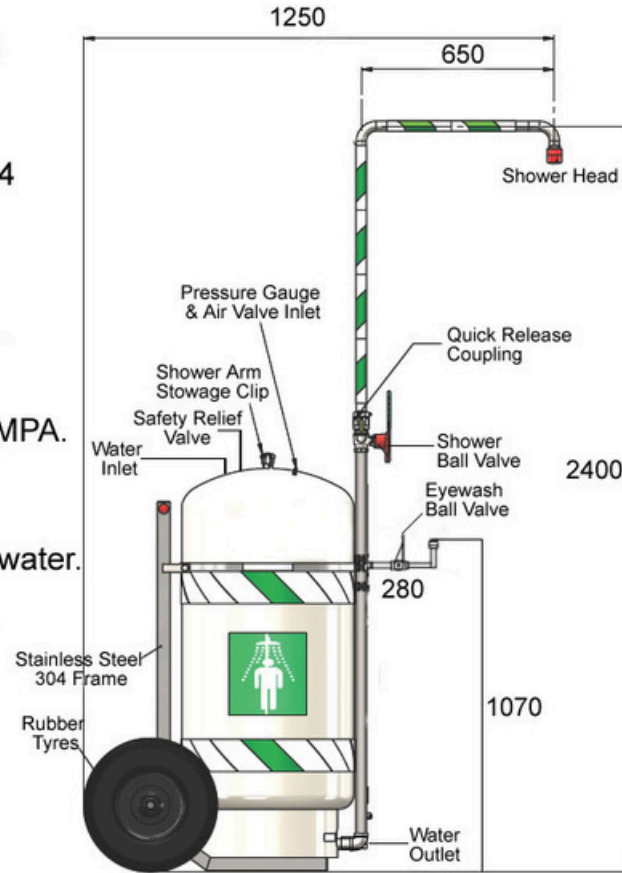

Authorised Distributor in Singapore

ANSAC

ANSAC TECHNOLOGY (S) PTE LTD

35, Marsiling Industrial Estate Road 3,
#02-01 Singapore 739257

+65 6368 0225 | sales@ansac-tech.com.sg

www.ansac-tech.com.sg

Contact Us

