

Floor Mounted Safety Shower With Eye Wash- Epoxy Coating

PRODUCT DETAILS

Emergency Eyewash And Shower Is An Emergency Device The temporarily Relieves Any Toxic Or Harmful Substances Such As Corrosive Chemical Liquids, From Incurring Further Damage To A Physical Body In Case The Hazardous Substance Spills To The Body, Face Or Eyes Of Workers And Makes Time For Professional Medical Care.

Comply With Standard Of Ansiz358.1-2014 And Requirement Of OSHA. In OSHA 29CFR 1910.151, It Provides That In Any Environment Where Human Eyes Or Body May Be Exposed To Any Harmful Or Corrosive Material; Proper Equipment Shall Be Placed At The Working Area For Showing Of Eyes And Body In Emergency’s.



PRODUCT DETAILS


MODEL NO SS-350

PRODUCT DETAILS	
Piping Material:	SS304 Material with Epoxy Coating
Shower Head:	250mm Abs
Shower Value	1"stainless Steel 304 Ball valve
Shower Activation:	By Pull Rod Stainless steel
Eyewash Bowl:	ABS with SS Dust Cover
Eyewash Head:2	ABS
Suitable For Outdoor Placement	Comes with Foot Treadle
ANSIZ358.1 EN15154-1&2 OSHA & NFPA	

SPECIFICATION

MATERIALS OF CONSTRUCTION	
Type	Combination Unit
Standard	ANSIZ358.1-2014 EN1514 AS4775-2007
Materials	SS304 Material with Epoxy Coating
Eyewash Flow Rate	>11.4l/min
Shower Floe Rate	> 75.7l/min
Flushing Time	>15 Min
Inlet Size	1-1/4"
Outlet Size	1-1/4"
AMBIENT OPERATING TEMPERATURE	
Minimum Ambient Temperature	5℃/41℉
Minimum Ambient Temperature	45℃/95℉
Suitable For	Indoor & Outdoor Placement


General Arrangement Drawing

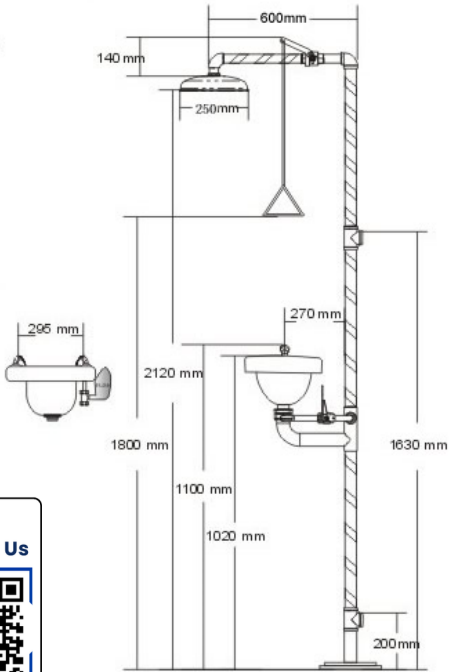

Authorised Distributor in Singapore

ANSAC
ANSAC TECHNOLOGY (S) PTE LTD
35, Marsiling Industrial Estate Road 3,
#02-01 Singapore 739257
+65 6368 0225 | sales@ansac-tech.com.sg
www.ansac-tech.com.sg

Contact Us

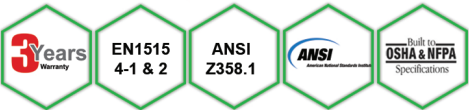

MODEL NO S350