



Floor Mounted Safety Shower With Eye Wash


PRODUCT DETAILS

Emergency eyewash and shower is an emergency device that temporarily relieves any toxic or harmful substances, such as corrosive chemical liquids, from incurring further damage to a physical body in case the hazardous substance spills to the body, face or eyes of workers, and makes time for professional medical care.

Comply with standard of ANSI Z358.1-2014, and requirements of OSHA. In OSHA 29 CFR 1910.151, it provides that in any environment where human eyes or body may be exposed to any harmful or corrosive material, proper equipment shall be placed at the working area for showering of eyes and body in emergencies.



- ✔ Piping Material: Galvanized Steel.
- ✔ Shower Head: 250mm ABS in safety green
- ✔ Shower Valve: 1" corrosion-resistant brass
- ✔ Shower Activation: By pull rod stainless
- ✔ Eyewash Bowl: ABS in safety green color.
- ✔ Eyewash Head: 2 Sprayers with dust cover.
- ✔ Suitable for Outdoor Placement
- ✔ ANSI Z358.1 | EN15154-1&2 | OSHA & NFPA

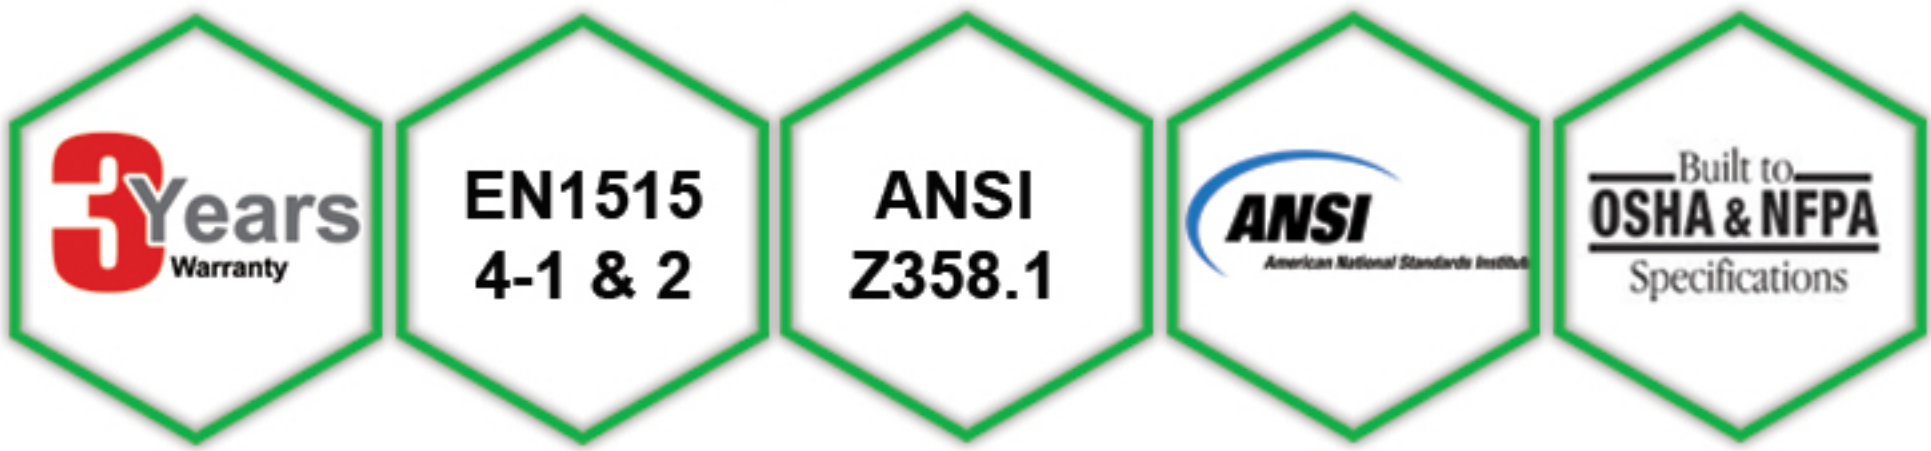

ANSAC

ANSAC TECHNOLOGY (S) PTE LTD
35, Marsiling Industrial Estate Road 3,
#02-01 Singapore 739257
+65 6368 0225 | sales@ansac-tech.com.sg
ansac-tech.com.sg

Contact Us

PRODUCT SPECIFICATION

MODEL NO	S250	MODEL NO
S/NO	ITEM	SPECIFICATION
1	Type	Combination Unit
2	Standard	ANSI Z358.1-2014 EN15154 AS4775-2007
3	Material	Galvanized Steel
4	Eyewash Flow Rate	≥11.4L/min
5	Shower Floe Rate	≥75.7L/min
6	Flushing Time	≥15 min
7	Inlet Size	1-1/4"
8	Outlet Size	1-1/4"
9	Minimum Ambient Temperature	5°C/41°F
10	Minimum Ambient Temperature	35°C/95°F
11	Suitable for	Indoor & Outdoor Placement

